




LMM SWITCH INSTALLATION

STEP 1
LOCATE ECM PLUG

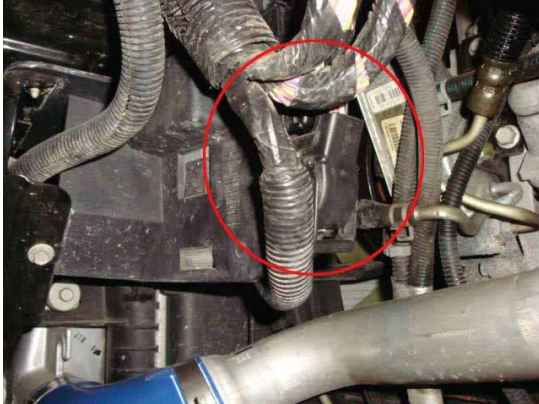

STEP 2
REMOVE THE LARGER PLUG



STEP 3
REMOVE PURPLE LOCKING CLIP
DO NOT LOSE




STEP 4
REMOVE TOP COVER



STEP 5
INSERT NEW PINS/WIRES ***REVERSE
PROCEDURES WHEN FINISHED***



STEP 6
PIN-OUT REFERENCE (VIEWED
LOOKING AT CONNECTOR FACE)

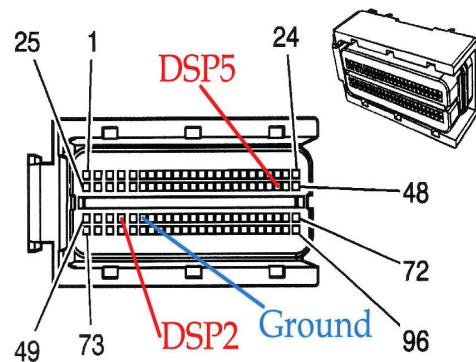

STOCK CONNECTOR	GDP TUNING WIRES
SIGNAL=CONNECTOR 1 (LARGER PLUG), PIN 46 (NEXT TO TAN WIRE)	SIGNAL = PURPLE
GROUND=CONNECTOR 1 (LARGER PLUG), PIN 54 (NEXT TO YELLOW/BLACK WIRE)	GROUND = BLACK

NOTE: IT MAY ALSO BE POSSIBLE TO MAKE THE GROUND CONNECTION IN THE CAB RATHER THAN THE ECM